

INTELLIGENT AIR OPERATED DIAPHRAGM PUMPS

2020 | 1

- ✓ Full control and feedback
intelligent pump control solution
- ✓ Ultra low start pressure
pump starts at 0.3 bar (4.4 PSI)
- ✓ Lower operational costs
reduced air consumption



Powered by

LEAP®
LOW ENERGY AIR PUMP TECHNOLOGY



» All about your flow™

www.tapflo.com

» All about your flow™

We began our journey 40 years ago in Kungälv, a small town on the Swedish west coast, as a family company with an ambition to one day become a global player on the pump market.

Since 1980, we have taken pride in delivering a wealth of knowledge and passion for pumps to the industry, whilst supplying a wide range of premium products for various industrial applications.

Over the years, the company has developed into a global Tapflo Group with branches and distributors present in nearly every region of the world.

One thing did not change - we are still a family company.

Our solutions are designed and manufactured in Europe and distributed globally to offer the best service and flow solutions to our customers for a variety of applications.

Our values, Commitment, Quality and Simplicity are reflected both in our product and business approach.



For fast and flexible service and high-quality products readily available worldwide, choose Tapflo.

Quality commitment

At Tapflo we are simply committed to quality. As a result, our production standards, as well as products quality, comply with various globally recognised certification and quality control standards. The Tapflo manufacturing process is certified according to ISO 9001:2015, confirming that our processes are appropriate, effective, customer-focused and continuously improved.



EN 10204

Tapflo values

Our culture is concluded in Our values

Commitment

We are different from our competitors because of our willingness to exceed the customers' expectations, move fast and be flexible. Our culture is based on the spirit of togetherness, enthusiasm and integrity. We come from all over the world but we share the same values and we respect each other. We are committed.

Quality

We understand that the quality in our work is never better than the weakest link, that's why we focus on every small detail. We share a common passion for continuously finding more efficient and effective ways to provide value to our customers. As a manufacturer we have control of the complete process both in terms of our products and the way we operate internally. That is why we manufacture the highest quality pumps in our segment.


Simplicity

We have a saying, "Simple is art" which means we try to find smooth and uncomplicated solutions in everything. By keeping it simple we can focus on the essential, like designing uncomplicated pumps with few components. For us it is a key to success; strive to simplify what is complex.

TC series

Intelligent air operated diaphragm pumps











TC Intelligent pumps are fitted with ingenious LEAP® technology developed by Tapflo.



LEAP® or 'Low Energy Air Pump' is a patented technology used in AODD pumps to reduce the minimum operating air pressure by reducing internal losses and friction found in conventional AODD pumps.

LEAP uses a unique indirect system to detect the position of the diaphragm shaft controlling the diaphragm movement automatically.

Features & Benefits

- | | |
|--|--|
|  Available in Plastic, Metal and Sanitary series AODD pumps TC50 - TC425 (T50 - T425 equivalent) |  Noise Reduction ability to utilise lower air pressure reduces the noise of the pump. |
|  Retrofit Leap can be fitted to any existing Tapflo Air Operated Diaphragm Pumps. |  Improved Lifespan the TC series uses an air valve that has a significantly longer life expectancy over rubber seal technology. |
|  Batch Dispensing allowing the pump to automatically stop after the required volume has been dispensed. |  Improved Maintenance main air valve can be changed in under two minutes without the removal of the pump from the process line. |
|  Electrical feedback signal allows for external monitoring of the pump process. |  Control Simplification no need for an external pneumatic solenoid valve, reducing costs and simplifying control. |
|  Dry Running by analysing the frequency of pulses, the pump can analyse when it is running dry. |  Dead Heading as with dry running, the frequency of pulses can be monitored, alerting if the pump has a blockage. |



Sustainable energy management
Achieve up to **70% energy savings**



TC series

Energy Savings

Tests undertaken to measure the performance of a standard pump against the new **TC intelligent pump** have resulted in an **energy saving of up to 70%.**


The extensive testing procedure has shown that the largest amount of energy required by a pump is used to overcome the resistance created by the pump itself. Another major issue is found in the mid-port scenario, wherein the attempt to save energy by turning down the air pressure to a much lower level causes the stall of the pump.

The pump fitted with LEAP® Technology is able to **start pumping at 0.3 bar without stalling**, in test the pump was already achieving flow rates of **70% of its maximum open end flow before other pumps had even started.**

At 0.3 bar (4.4 Psi) a standard Tapflo T50 pump fitted with LEAP® Technology was already pumping at over 23 l/min, all other air pumps tested failed to even start.



Graph showing fluid flow against air pressure required

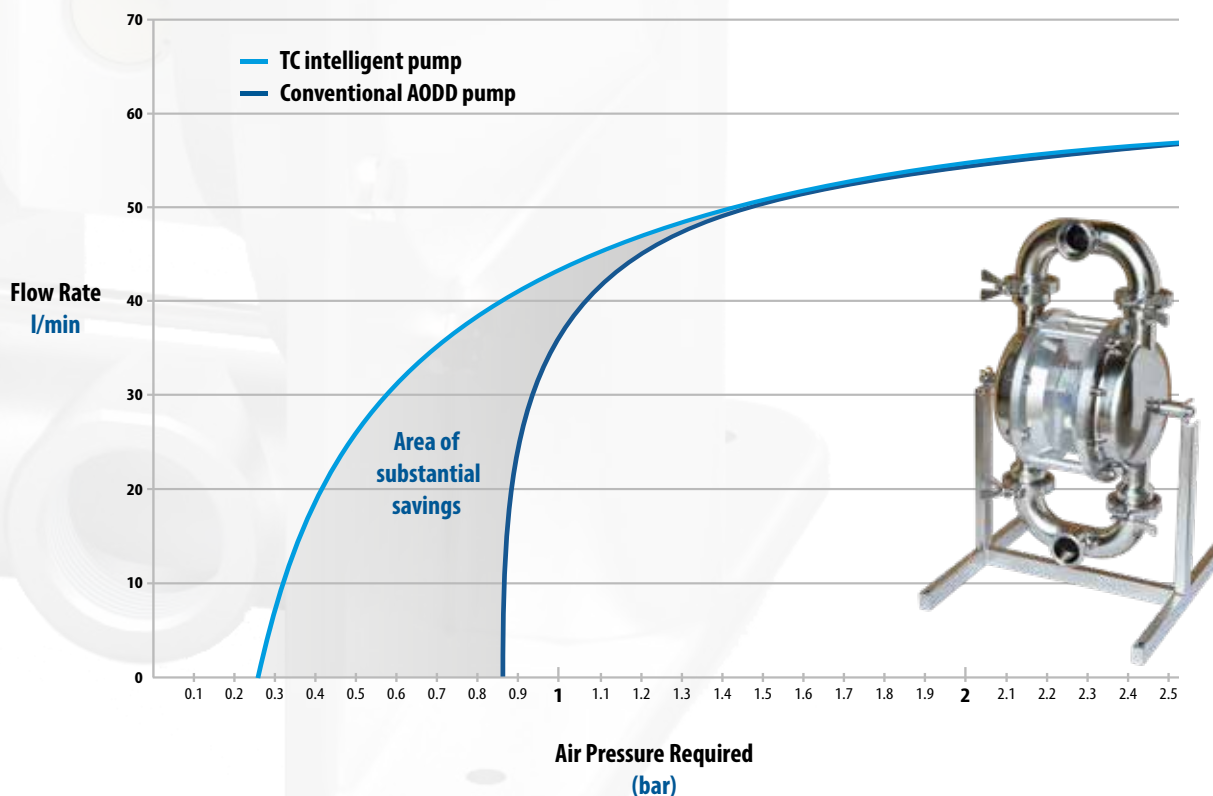

TC series

A new generation of diaphragm pump

The **TC Intelligent pump** can operate in two settings, Internal and External Pilot.

Internal Pilot


In standard conditions the pump runs with a single **air supply from 0.3 bar**, deriving air supply to the control module from the Internal Pilot - main air supply.

External Pilot

In some applications however, there may be a need to use the External Pilot - a separate (additional) air supply to the LEAP module.

The EP assists in moving the air valve in application of:

- **Extremely low pressure** - it supports shifting of the air valve;
- **High pressure of 8 bar** - to create an air cushion preventing the air valve from being fired backwards and forwards.

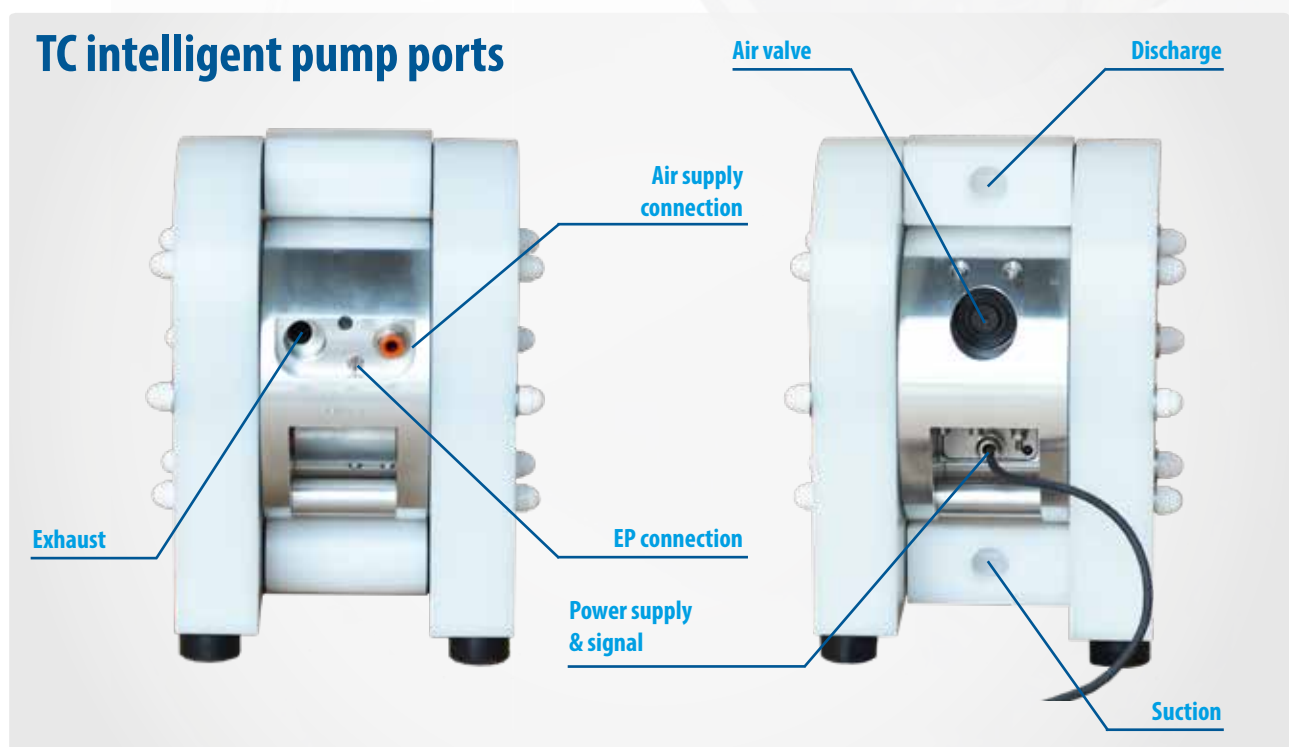

New air valve generation


The new generation TC lube free air valve is easily taken out for servicing without dismantling of the pump.



TC series

A new generation of diaphragm pump

TC pump installation example

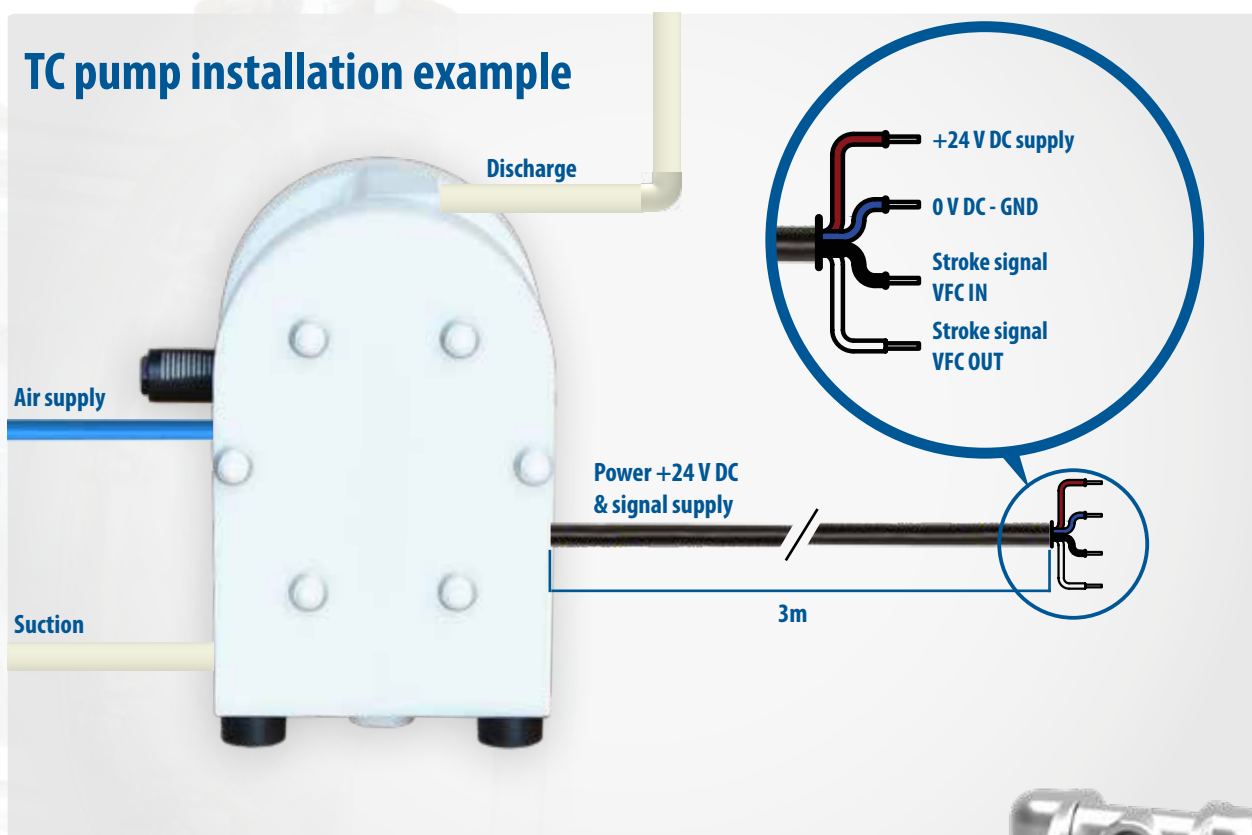


The TC series intelligent pump requires 24 V DC to run.



TC intelligent pumps range


PE & PTFE pumps

- » TC50
- » TC100
- » TC200
- » TC400

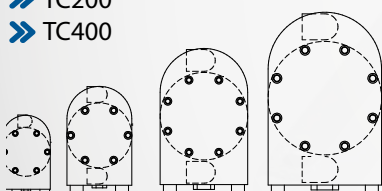


Metal pumps

- » TC70
- » TC120
- » TC220
- » TC420

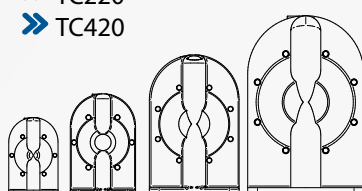

Sanitary pumps

- » TC80
- » TC125
- » TC225
- » TC425



Performance





The performance curves are based on water at 20°C. Other circumstances might change the performance. See below how the capacity will change at different viscosities and suction lifts.

Performance curves

Example see the red line ● — — — — — ●


A flow of 30 litres/minute is desired. The discharge head is calculated to 30 mWC.

We choose a TC70. It requires an air pressure of 4 bar and will consume approximately 0.20 Nm³ air per minute.

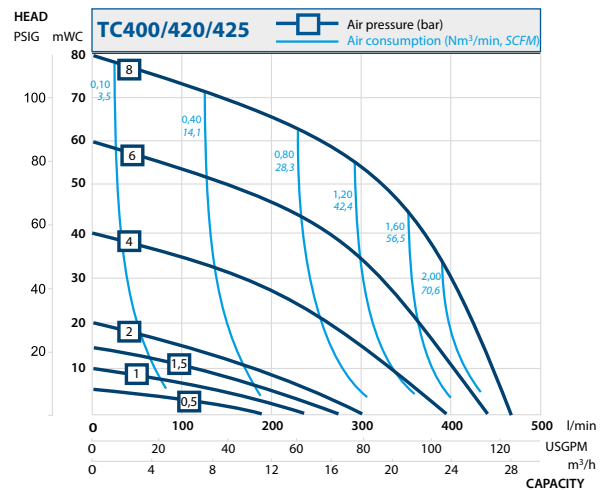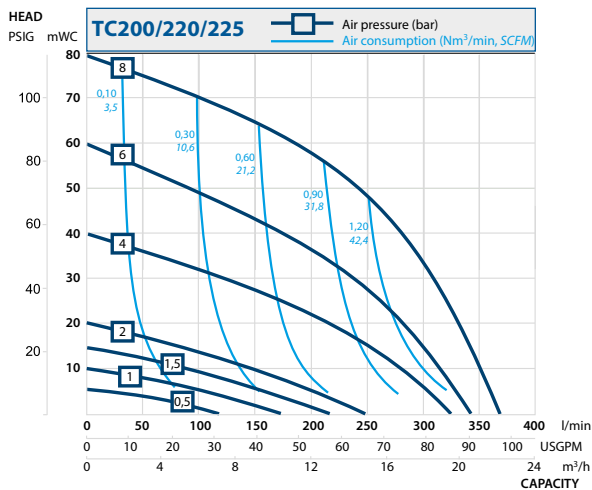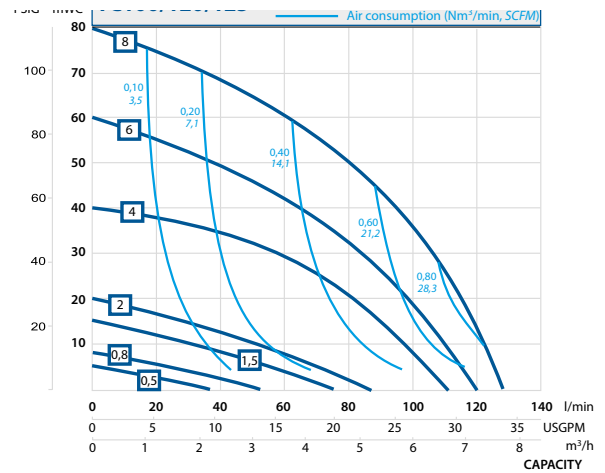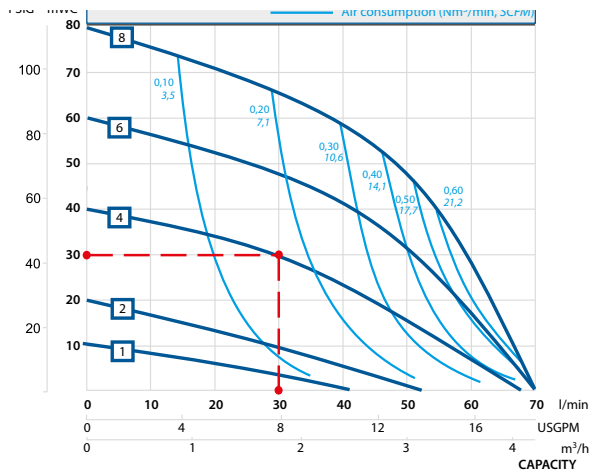


Capacity changes

Capacity changes at different suction lifts

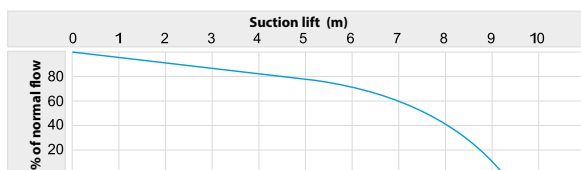

Capacity changes at different viscosities

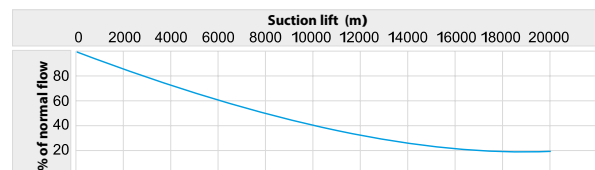


Performance curves are based on Metal series pumps. Should you need detailed performance curves for other executions please contact us.
Changes reserved without notice

Dimensions & technical data

TC PE & PTFE pumps

Dimensions


PE pumps

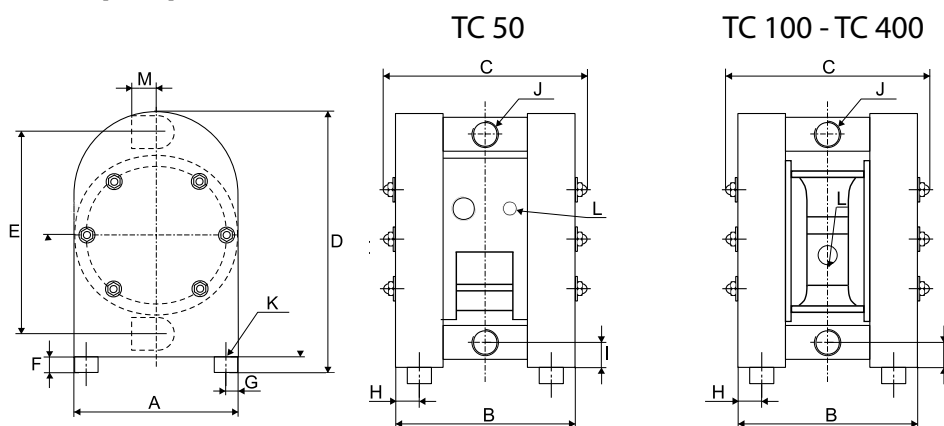

Dimensions in mm (where other is not indicated)
Dimensions in inch (where other is not indicated)

| Dim | Pump size | | | |
|-----|-------------|--------------|-----------------|--------------|
| | TC 50 | TC 100 | TC 200 | TC 400 |
| A | 150 5.91 | 200 7.87 | 270 10.63 | 350 13.78 |
| B | 169 6.30 | 214 8.43 | 310 12.20 | 380 14.96 |
| B2 | 200 7.87 | 254 10.00 | 350 13.78 | 420 16.54 |
| C | 190 7.48 | 250 9.84 | 345 13.58 | 425 16.73 |
| D | 243 9.57 | 320 12.60 | 450 17.72 | 563 22.17 |
| E | 190 7.48 | 252 9.92 | 345 13.58 | 440 17.32 |
| F | 15 0.59 | 15 0.59 | 30 1.18 | 30 1.18 |
| G | 17 0.67 | 30 1.18 | 30 1.18 | 30 1.18 |
| H | 16 0.63 | 30 1.18 | 30 1.18 | 30 1.18 |
| H2 | 36 1.41 | 50 1.96 | 50 1.96 | 30 1.18 |
| I | 20 0.79 | 28 1.10 | 38 1.50 | 48 1.89 |
| J | 1/2" 1/2 | 1" 1 | 1 1/2" 1 1/2 | 2" 2 |
| K | M8x25 M8 | M8x25 M8 | M8x25 M8 | M8x25 M8 |
| L | 1/4" 1/4 | 1/4" 1/4 | 1/2" 1/2 | 1/2" 1/2 |
| M | 25 0.98 | 38 1.50 | 54 2.13 | 70 2.76 |

PTFE pumps

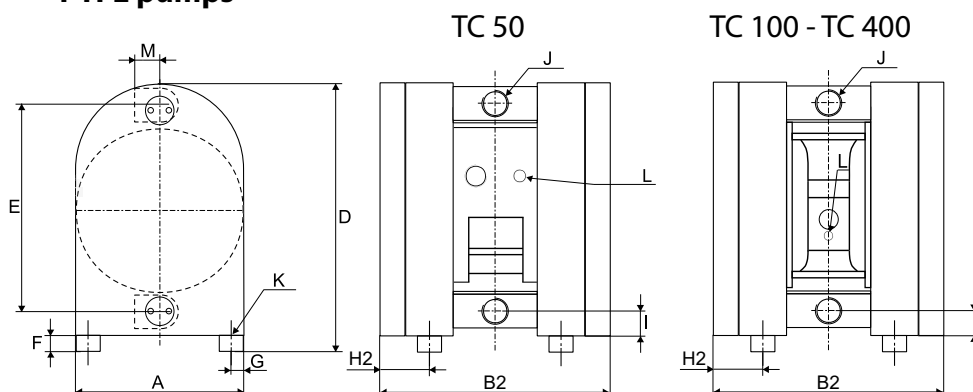

General dimensions only, ask us for detailed drawings.
Changes reserved without notice

Technical data

| Data | Pump size | | | |
|--------------------------------------|-------------|------------|------------|--------------|
| | TC 50 | TC 100 | TC 200 | TC 400 |
| General characteristics | | | | |
| *Max capacity (l/min) / (US gpm) | 60 / 15.8 | 125 / 33 | 330 / 87 | 570 / 150 |
| **Volume per stroke (ml) / (cu in) | 87.5 / 5.34 | 280 / 17.1 | 933 / 56.9 | 2300 / 140.3 |
| Max discharge pressure (bar) / (psi) | 8 / 116 | 8 / 116 | 8 / 116 | 8 / 116 |
| Max air pressure (bar) / (psi) | 8 / 116 | 8 / 116 | 8 / 116 | 8 / 116 |
| ***Max suction lift dry (m) / (Ft) | 2.5 / 8 | 3.5 / 11 | 4 / 13 | 4 / 13 |
| Max suction lift wet (m) / (Ft) | 9 / 29.5 | 9 / 29.5 | 9 / 29.5 | 9 / 29.5 |
| Max size of solids (ø in mm) / (in) | 4 / 0.16 | 6 / 0.24 | 10 / 0.39 | 15 / 0.59 |
| Max temp, pump in PE (°C) / (°F) | 70 / 158 | 70 / 158 | 70 / 158 | 70 / 158 |
| Max temp, pump in PTFE (°C) / (°F) | 100 / 212 | 100 / 212 | 100 / 212 | 100 / 212 |
| Min temperature (°C) / (°F) | -20 / -4 | -20 / -4 | -20 / -4 | -20 / -4 |
| Weight | | | | |
| TC pump in PE (kg) / (lb) | 5,5 / 12 | 11 / 24 | 25 / 55 | 46 / 101 |
| TC pump in PTFE (kg) / (lb) | 10 / 22 | 18 / 40 | 45 / 99 | 92 / 203 |



* = Recommended flow is half of the max flow, i.e. recommended flow for a TC100 is 50 l/min (13.2 US gpm)


** = The value is based on pumps with EPDM diaphragms. Pumps with PTFE diaphragms have about 15% less volume

*** = This is max value with stainless steel valve balls, other valve ball materials may reduce the suction. Please consult us.

TC Metal pumps

Dimensions


Aluminium and cast iron pumps

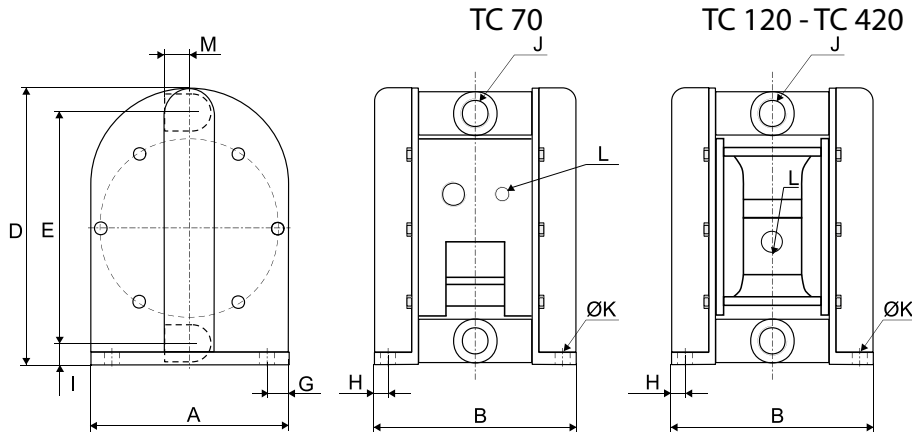

Dimensions in mm (where other is not indicated)
Dimensions in inch (where other is not indicated)

| Dim | Pump size | | | |
|-----|-----------|--------|--------|--------|
| | TC 70 | TC 120 | TC 220 | TC 420 |
| A | 150 | 200 | 270 | 350 |
| | 5.91 | 7.87 | 10.63 | 13.78 |
| B | 168 | 195 | 265 | 342 |
| | 6.61 | 7.68 | 10.43 | 13.46 |
| B2 | 156 | 204 | 280 | 344 |
| | 6.14 | 8.03 | 11.02 | 13.54 |
| D | 229 | 302 | 412 | 537 |
| | 9.02 | 11.89 | 16.22 | 21.14 |
| D2 | 229 | 310 | 422 | 529 |
| | 9.02 | 12.20 | 16.61 | 20.83 |
| E | 190 | 252 | 346 | 449 |
| | 7.48 | 9.92 | 13.62 | 17.68 |
| E2 | 192 | 257 | 348 | 442 |
| | 7.56 | 10.12 | 13.70 | 17.40 |
| G | 17 | 20 | 25 | 35 |
| | 0.67 | 0.79 | 0.98 | 1.38 |
| G2 | 17 | 20 | 31 | 35 |
| | 0.67 | 0.79 | 1.22 | 1.38 |
| H | 19 | 20 | 28 | 33 |
| | 0.75 | 0.79 | 1.10 | 1.30 |
| H2 | 13 | 23 | 34 | 32 |
| | 0.51 | 0.91 | 1.34 | 1.26 |
| I | 20 | 27 | 34 | 48 |
| | 0.79 | 1.06 | 1.34 | 1.89 |
| I2 | 19 | 27 | 36 | 45 |
| | 0.75 | 1.06 | 1.42 | 1.77 |
| J | 3/4" | 1" | 1 1/2" | 2" |
| | 3/4 | 1 | 1 1/2 | 2 |
| ØK | 8.5 | 8.5 | 8.5 | 8.5 |
| | 0.33 | 0.33 | 0.33 | 0.33 |
| L | 1/4" | 1/4" | 1/2" | 1/2" |
| | 1/4 | 1/4 | 1/2 | 1/2 |
| M | 29 | 33 | 44 | 57 |
| | 1.14 | 1.30 | 1.73 | 2.24 |
| M2 | 40 | 52 | 70 | 90 |
| | 1.57 | 2.05 | 2.76 | 3.54 |

Stainless steel pumps

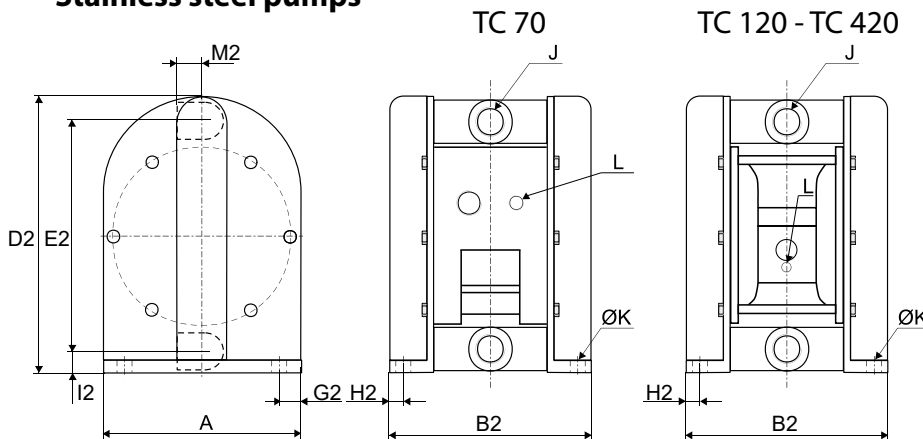

Technical data

General dimensions only, ask us for detailed drawings.
Changes reserved without notice

| Data | Pump size | | | |
|--------------------------------------|-------------|------------|------------|------------|
| | TC 70 | TC 120 | TC 220 | TC 420 |
| General characteristics | | | | |
| *Max capacity (l/min) / (US gpm) | 78 / 20 | 158 / 41 | 330 / 87 | 570 / 150 |
| **Volume per stroke (ml) / (cu in) | 87.5 / 5.34 | 420 / 25.6 | 933 / 56.9 | 2300/140.3 |
| Max discharge pressure (bar) / (psi) | 8 / 116 | | | |
| Max air pressure (bar) / (psi) | 8 / 116 | | | |
| *** Max suction lift dry (m) / (Ft) | 3 / 9.8 | 4 / 13 | 4 / 13 | 4 / 13 |
| Max suction lift wet (m) / (Ft) | 8 / 26 | 9 / 29.5 | 9 / 29.5 | 9 / 29.5 |
| Max size of solids (ø in mm) / (in) | 4 / 0.16 | 6 / 0.23 | 10 / 0.40 | 15 / 0.59 |
| Max temp with EPDM/NBR (°C) / (°F) | 80 / 176 | | | |
| Max temp with PTFE (°C) / (°F) | 110 / 230 | | | |
| Min temperature (°C) / (°F) | -20 / -4 | | | |
| | | | | |
| Weight | | | | |
| TC pump in alu (kg) / (lb) | 6 / 13 | 9 / 20 | 21 / 46 | 37 / 82 |
| TC pump cast iron (kg) / (lb) | 12 / 26 | 18 / 40 | 46 / 101 | 83 / 183 |
| TC pump in AISI 316 (kg) / (lb) | 7.5 / 17 | 17 / 37 | 39 / 86 | 70 / 154 |

* = Recommended flow is half of the max flow, i.e. recommended flow for a TC120 is 60 l/min (15.9 US gpm).

** = The value is based on pumps with EPDM diaphragms. Pumps with PTFE diaphragms have about 15% less volume.

*** = This is max value with stainless steel valve balls, other valve ball materials may reduce the suction. Please consult us.




Dimensions & technical data

TC Sanitary pumps

Dimensions


Dimensions in mm (where other is not indicated)

Dimensions in inch (where other is not indicated)

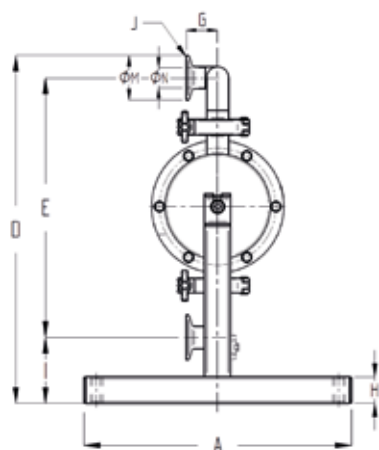

TC 80

TC 125 - TC 425

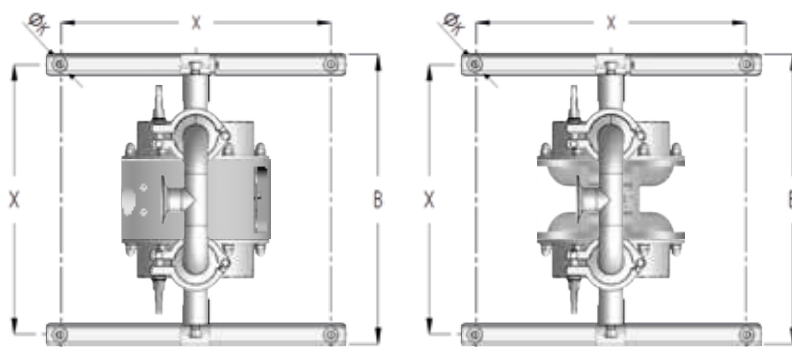

| Dim | Pump size | | | |
|----------------|------------------|--------|-------------|-------------|
| | TC 80 | TC 125 | TC 225 | TC 425 |
| A | 303 | 328 | 412 | 476 |
| | 11.9 | 12.9 | 16.2 | 18.7 |
| B | 295 | 320 | 404 | 468 |
| | 11.6 | 12.6 | 15.9 | 18.4 |
| D | 393 | 458 | 646 / 792** | 808 / 950** |
| | 15.5 | 18 | 25.4 / 31.1 | 31.8 / 37.4 |
| E | 294 | 350 | 528 / 690** | 664 / 775** |
| | 11.6 | 13.8 | 20.6 / 27.2 | 26.1 / 30.5 |
| G | 36 | 44 | 50 | 80 |
| | 1.4 | 1.7 | 2.0 | 3.1 |
| H | 30 | 30 | 30 | 30 |
| | 1.2 | 1.2 | 1.2 | 1.2 |
| I | 73 | 71 | 86 | 97 |
| | 2.9 | 2.8 | 3.4 | 3.8 |
| J | TC ¹ | 1" | 1 1/2" | 2" |
| | DIN ² | DN25 | DN40 | DN50 |
| | SMS ³ | 25 | 38 | 51 |
| | RJT | 1" | 1 1/2" | 2" |
| K | 9 | 9 | 9 | 9 |
| | 0.4 | 0.4 | 0.4 | 0.4 |
| Air inlet size | 1/4" | 1/4" | 1/2" | 1/2" |
| | 1/4 | 1/4 | 1/2 | 1/2 |
| ØM* | 50.5 | 50.5 | 64 | 91 |
| | 2.0 | 2.0 | 2.5 | 3.6 |
| ØN* | 22.6 | 35.6 | 49 | 66 |
| | 0.9 | 1.4 | 1.9 | 2.6 |
| X | 275 | 300 | 384 | 448 |
| | 10.8 | 11.8 | 15.1 | 17.6 |

* = Dimensions for standard clamp connections only

1 = Clamp connections/pipes according to SMS3017/ ISO2037 (T425)

2 = Threaded connections according to DIN 11851

3 = Threaded connections according to SMS 1145

General dimensions only, ask us for detailed drawings.

Changes reserved without notice

Technical data

| Data | Pump size | | | |
|--------------------------------------|-------------|------------|------------|--------------|
| | TC 80 | TC 125 | TC 225 | TC 425 |
| General characteristics | | | | |
| *Max capacity (l/min) / (US gpm) | 78 / 20.6 | 155 / 41 | 330 / 87 | 570 / 150 |
| **Volume per stroke (ml) / (cu in) | 87.5 / 5.34 | 300 / 18.3 | 933 / 56.9 | 2300 / 140.3 |
| Max discharge pressure (bar) / (psi) | 8 / 116 | 8 / 116 | 8 / 116 | 8 / 116 |
| Max air pressure (bar) / (psi) | 8 / 116 | 8 / 116 | 8 / 116 | 8 / 116 |
| ***Max suction lift dry (m) / (Ft) | 3 / 9.8 | 4 / 13 | 4 / 13 | 4 / 13 |
| Max suction lift wet (m) / (Ft) | 8 / 26 | 9 / 29.5 | 9 / 29.5 | 9 / 29.5 |
| Max size of solids (ø in mm) / (in) | 4 / 0.16 | 6 / 0.24 | 10 / 0.39 | 15 / 0.59 |
| Max temperature (°C) / (°F) | 110 / 230 | 110 / 230 | 110 / 230 | 110 / 230 |
| Weight | | | | |
| Weight (kg) / (lb) | 8,5 / 19 | 12 / 26 | 22 / 49 | 37 / 82 |

* = Recommended flow is half of the max flow, i.e. recommended flow for a TC125 is 60 l/min (15.9 US gpm).

** = The value is based on pumps with EPDM diaphragms. Pumps with PTFE diaphragms have about 15% less volume.

*** = This is max value with stainless steel valve balls, other valve ball materials may reduce the suction. Please consult us.



Tapflo intelligent solutions

Guardian systems



The Guardian is an energy conservation device designed to protect an air operated double diaphragm (AODD) pump from operating in an inefficient manner that uses unnecessary energy and reduces the life of its parts. It also offers the added benefit of providing greater safety to applications of high risk.

The Guardian directly monitors the discharge fluid pressure against its set point stopping the pump if the media pressure increases above the set point (closed valve) or falls below the set point (dry-run) dependant on configuration.

Applications of Guardian systems

Barrier Protection

Barrier pumps (TB) have an additional set of diaphragms used to back-up the primary diaphragms. In case of a breach the liquid remains inside the pump, instead of leaking out through the air exhaust.

The Guardian monitors the pressure between the primary and secondary diaphragms, stopping the pump if the pressure increases above the set point.

Dry run & stop


The Guardian monitors the fluid discharge pressure of the pump, stopping it if the pressure falls below the set point, caused by a lack of media on the suction causing air to be ingested into the pump.

Dead head & stop

The Guardian monitors the fluid discharge pressure of the pump, stopping it if the pressure rises to the set point, caused by a closed valve or over pressure in the discharge line.

Dead head & restart

The Guardian monitors the fluid discharge pressure of the pump, stopping it if the pressure rises to the set point, caused by a closed valve or over pressure in the discharge line. When the pressure falls below the set pressure, the pump automatically restarts.

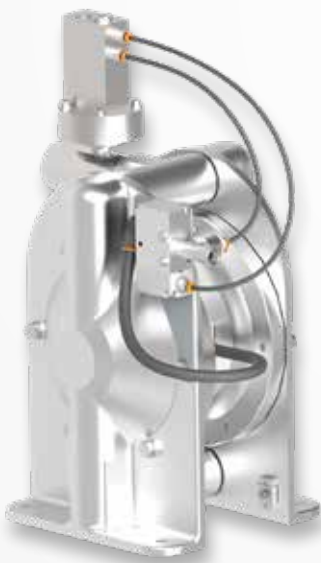

Sweden

Filaregatan 4 | S-442 34 Kungälv

Tel: +46 303 63390

Fax: +46 303 19916

E-mail addresses:

Commercial questions: sales@tapflo.com

Orders: order@tapflo.com

Tech support: support@tapflo.com

Tapflo products and services are available in 75 countries on 6 continents.

Tapflo is represented worldwide by own Tapflo Group Companies and carefully selected distributors assuring highest Tapflo service quality for our customers' convenience.

AUSTRALIA | AUSTRIA | AZERBAIJAN | BAHRAIN | BELARUS | BELGIUM | BOSNIA | BRAZIL | BULGARIA | CANADA | CHILE | CHINA | COLOMBIA | CROATIA | CZECH REPUBLIC | DENMARK | ECUADOR | EGYPT | ESTONIA | FINLAND | FRANCE | GREECE | GEORGIA | GERMANY | HONG-KONG | HUNGARY | ICELAND | INDIA | INDONESIA | IRAN | IRELAND | ISRAEL | ITALY | JAPAN | JORDAN | KAZAKHSTAN | KUWAIT | LATVIA | LIBYA | LITHUANIA | MACEDONIA | MALAYSIA | MEXICO | MONTENEGRO | MOROCCO | NETHERLANDS | NEW ZEALAND | NORWAY | POLAND | PORTUGAL | PHILIPPINES | QATAR | ROMANIA | RUSSIA | SAUDI ARABIA | SERBIA | SINGAPORE | SLOVAKIA | SLOVENIA | SOUTH AFRICA | SOUTH KOREA | SPAIN | SUDAN | SWEDEN | SWITZERLAND | SYRIA | TAIWAN | THAILAND | TURKEY | UKRAINE | UNITED ARAB EMIRATES | UNITED KINGDOM | USA | UZBEKISTAN | VIETNAM

Tapflo Group Companies

Australia

Tapflo Oceania (Pty)
Tel: +61 1800 303 633
sales@tapflo.com.au

Austria

Tapflo Austria
Tel: +43 732 27292910
sales@tapflo.at

Baltic States

Tapflo Latvia
Tel: +371 67472205
sales@tapflo.lv

Belarus

Tapflo Belarus
Tel: +375 17 3934609
sales@tapflo.by

Belgium

Tapflo Benelux B.V.
Tel: +31 (0)85 00 743 00
info@tapflo.nl

Bulgaria

Tapflo EOOD
Tel: +359 (0)2 974 18 54
office@tapflo.bg

Canada

Tapflo Canada
Tel: +1 514 813 5754
canada@tapflo.com

Croatia

Tapflo GmbH
Tel: +385 91 4884 666
sales@tapflo.hr

Czech Republic

Tapflo s.r.o.
Tel: +420 513 033 924
tapflo@tapflo.cz

China

Tapflo (Wuxi)
Tel: +86 510 8241 7072
sales@tapflo.cn

Denmark

Tapflo Danmark
Tel: +45 36 454600
info@tapflo.dk

France

Tapflo France
Tel: +33 1 34 78 82 40
info@tapflo.fr

India

Tapflo Fluid Handling India Pvt Ltd
Tel: +91 20 65000215
ac@tapflo.in

Ireland

Tapflo Ireland Ltd
Tel: +353 1 2011911
info@tapflo.ie

Italy

Tapflo Italia
Tel: +39 0362307698
info@tapfloitalia.com

Japan

Tapflo Japan K.K.
Tel: +81-3-6240-3510
tapflojp@tapflo.co.jp

Kazakhstan

Tapflo Kazakhstan
Tel: +7 727 3278347
sales@tapflo.kz

Netherlands

Tapflo Benelux B.V.
Tel: +31 (0)85 00 743 00
info@tapflo.nl

Poland

Tapflo Sp. z o.o.
Tel: +48 58 530 42 12
info@tapflo.pl

Romania

S.C. Tapflo Rom. S.r.l.
Tel: +40 21 3451255
sales@tapflo.ro

Russia

Tapflo Company
Tel: +7 495 232 18 28
sales@tapflo.com.ru

Serbia

Tapflo d.o.o.
Tel: +381 21 44 58 08
sales@tapflo.rs

Slovakia

Tapflo s.r.o.
Tel: +421 911 137 883
tapflo@tapflo.sk

Slovenia

Tapflo GmbH
Tel: +386 68 613 474
sales@tapflo.hr

Spain

Tapflo Iberica
Tel: +34 91 8093182
avives@tapfloiberica.es

South Africa

Tapflo (Pty) Ltd
Tel: +27 31 701 5255
sales@tapflo.co.za

Turkey

Tapflo Makina Ltd
Tel: +90 216 467 33 11
sales@tapflo.com.tr

Ukraine

TOB Tapflo
Tel: +380 44 222 68 44
sales@tapflo.ua

Uzbekistan

Tapflo Uzbekistan
Tel: +998 712370940
sales@tapflo.uz

United Kingdom

Tapflo (UK) Ltd
Tel: +44 2380 252325
sales@tapflo pumps.co.uk